



PANEL CUTOUT

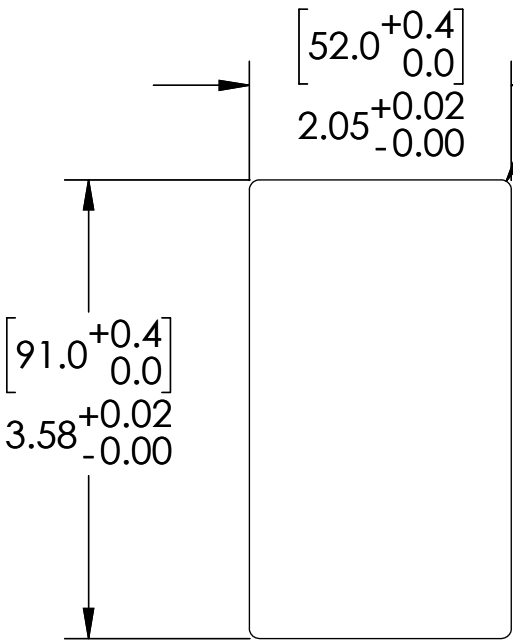

[2.0 MAX]
R0.08 MAX



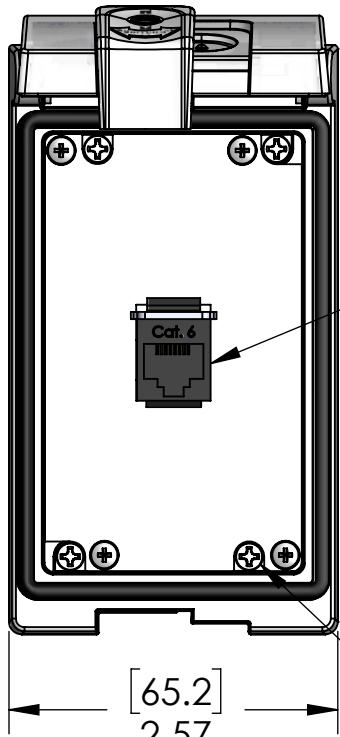


RJ45 Cat 6 Jack
EXTERIOR/INTERIOR

(X4) USE PH2 SCREW
DRIVER ON MOUNTING
SCREWS. (REF. MOUNTING
SCREW TORQUE)


ROTATE TWO TURNS COUNTER
CLOCKWISE TO RELEASE THE
TURN BUCKLE PRIOR TO TIGHTENING

TURN BUCKLES ROTATE 90 DEG. INTO
THEIR CLAMPING POSITION AS
MOUNTING SCREWS TIGHTEN.
DO NOT OVER-TORQUE!

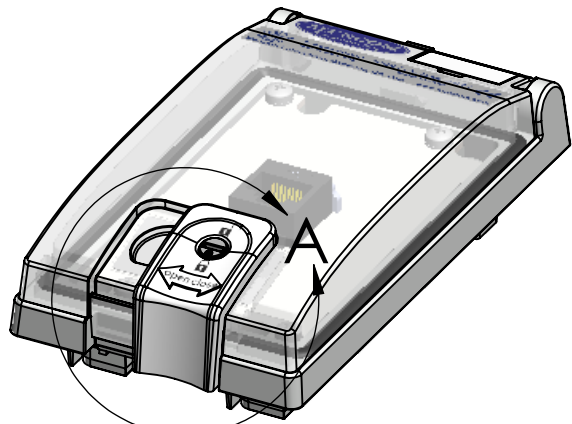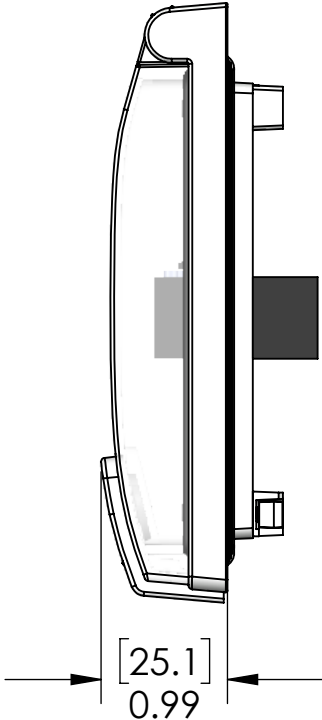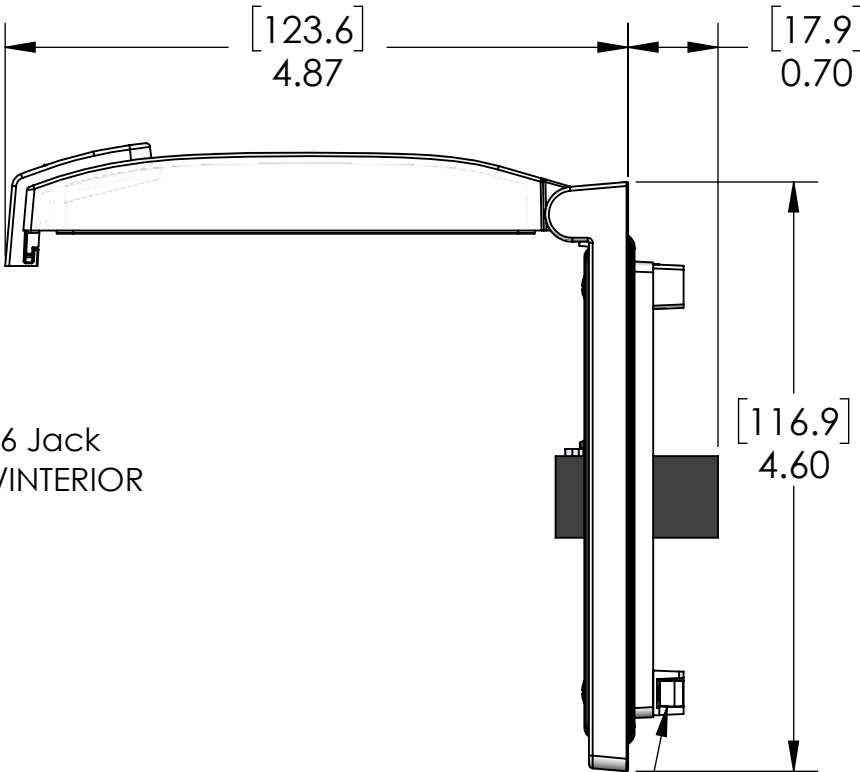

SLIDE LATCH TO OPEN/CLOSE
ROTATE LOCK TO LOCK CLOSED

LOCK

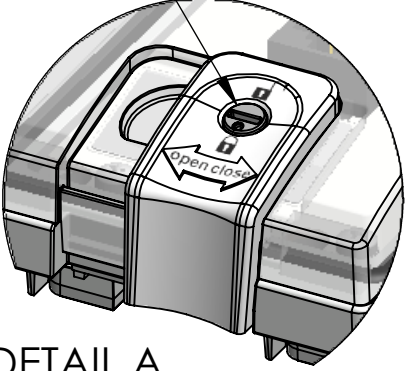

DETAIL A
SCALE 1 : 1



These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PIC RATINGS/SPECIFICATIONS

NEMA/UL EN 60529:	4, 12 IP65
PANEL THICKNESS:	5.0mm max
MOUNTING SCREW TORQUE:	0.8N-m

DRAWN BY	DG
DRAWN DATE	01/04/2019
CHECKED BY	DCG
CHECK DATE	01/04/2019

COMMENTS:

MENCOM CORPORATION

TITLE:
RJ45; LP1

SIZE	DWG. NO.	REV
B	LP1-RJ45	C
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

OPERATING TEMPERATURE: (-10°C / +60° C (+14° F / +140° F))		UNLESS OTHERWISE SPECIFIED:
HOUSING MATERIALS		DIMENSIONS ARE IN INCHES AND [MM]
BODY:	NICKEL PLATED ZINC	
GASKETS:	PUR FIPG	
FRONT COVER:	POLYCARBONATE	
LATCH & LOCK:	PBT	
		MATERIAL
		FINISH
		DO NOT SCALE DRAWING