REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/16/2005	BEM
B	ADDED TABLES	6/1/2006	

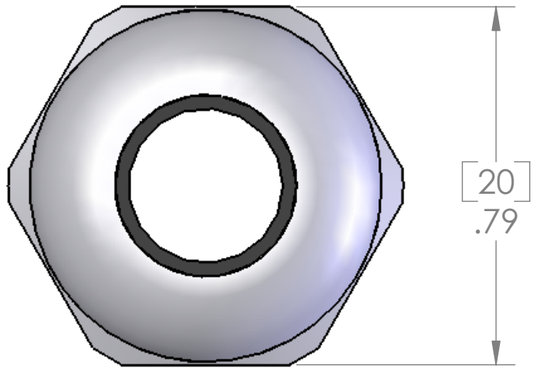

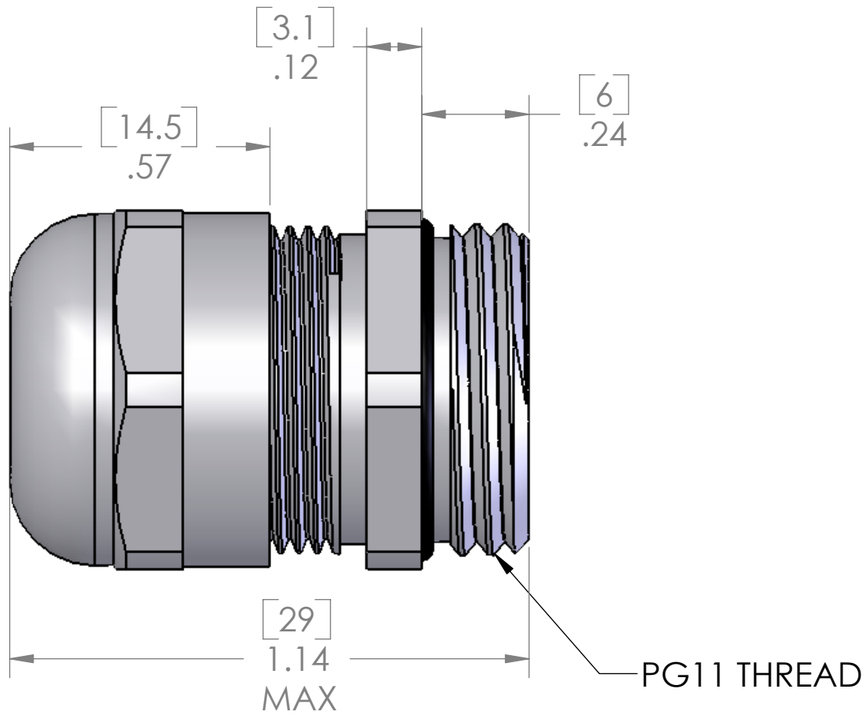

LOCK NUT INCLUDED BUT NOT SHOWN

SPECIFICATIONS:	Ⓑ
TIGHTENING TORQUE:	6.25 Nm
TEMPERATURE:	-20°C - +100°C

SEAL RATED T0: IP68

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NEOPRENE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N

PART NUMBER	SEALING RANGE
MCGB-11	.197 - .393 [5 - 10 mm]
MCGB-11R	.118 - .275 [3 - 7 mm]

Ⓑ

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:
METAL CABLE GLAND, PG13.5

SIZE	DWG. NO.	REV
B	MCGB-11	B

SCALE: 3:1 | WEIGHT: | SHEET 1 OF 1