WIRING		
MALE		FEMALE
PIN #		PIN #
1	-------	1
2	-------	2
3	-------	3
4	-------	4
5	-------	5
6	-------	6
7	-------	7
8	-------	8

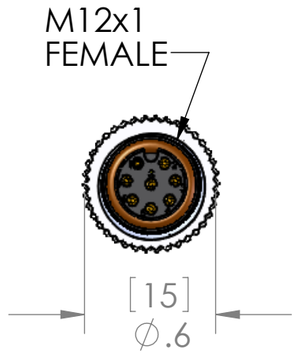

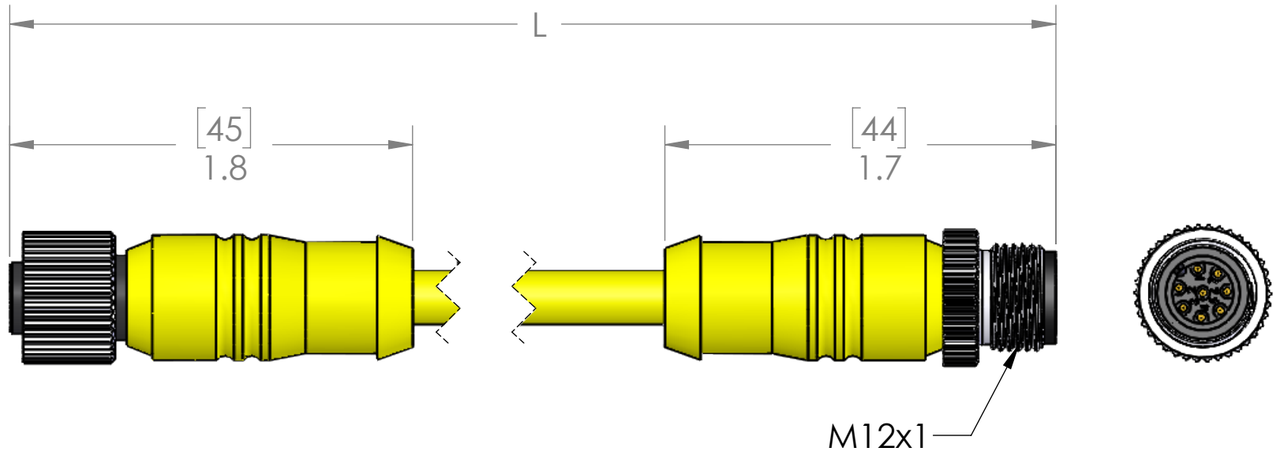

P/N	L	STD?
MDCM-8MFP-1M	40" [1M]	YES
MDCM-8MFP-2M	79" [2M]	YES
MDCM-8MFP-3M	118" [3M]	NO
MDCM-8MFP-4M	157" [4M]	YES
MDCM-8MFP-5M	197"[5M]	YES
MDCM-8MFP-6M	236" [6M]	NO
MDCM-8MFP-8M	315" [8M]	NO
MDCM-8MFP-10M	393" [10M]	YES
MDCM-8MFP-15M	590" [15M]	NO
MDCM-8MFP-20M	786" [20M]	NO
MDCM-8MFP-30M	1179" [30M]	NO
MDCM-8MFP-50M	1969" [50M]	NO

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	24 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	MYLAR W/DRAIN
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	60V
AMPS	2A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/22/2023
CHECKED BY	JJH
CHECK DATE	06/23/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
8 PL M-F PVC EXT CBL

SIZE	DWG. NO.	REV
B	MDCM-8MFP-ZZ	B

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1