


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/2/2008	

D

C

B

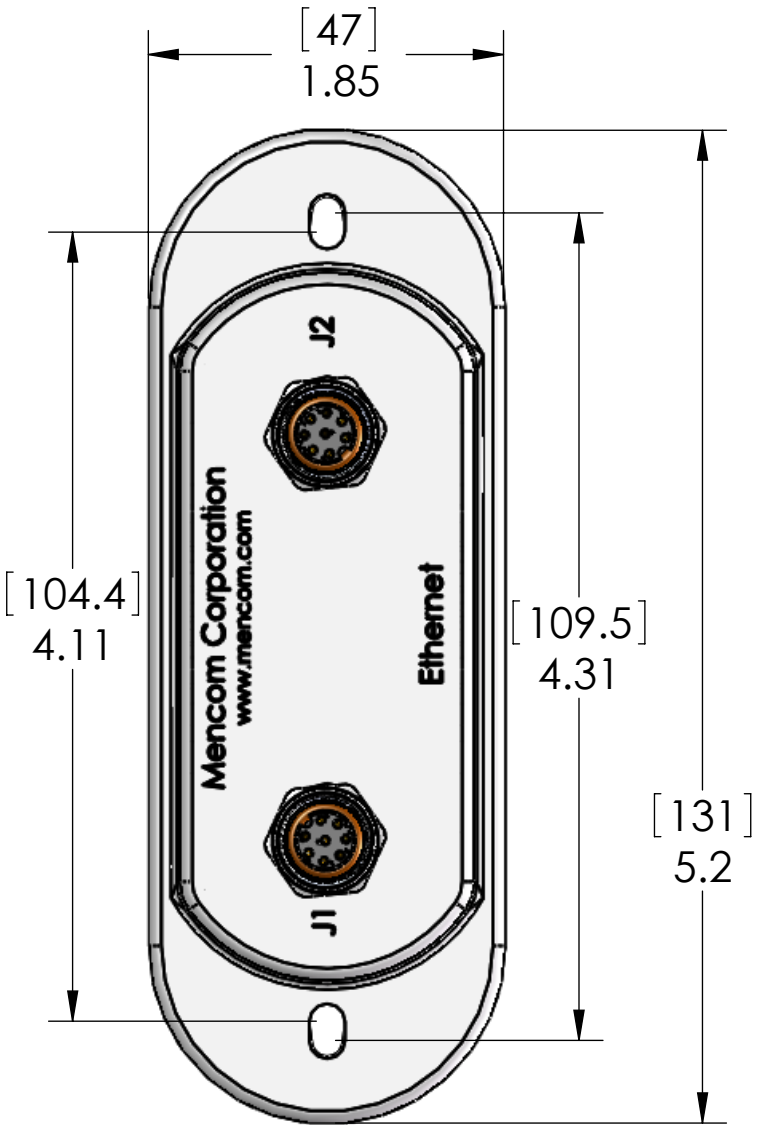


Included:



2 each 10-24 screws (for Form8 conduit bodies)
2 each 8-32 screws (for Mark 9 conduit bodies)
Can be mounted to 3/4" Form 8, Mark 9 and standard conduit bodies.

A


SPECIFICATIONS:	
HOUSING MATERIAL	GLASS FILLED PBT
RECEPTACLE HOUSING:	ANODIZED ALUMINUM
RECEPTACLE INSERT:	YELLOW PVC
RECEPTACLE CONTACTS:	GOLD PLATED COPPER ALLOY
OPERATING VOLTAGE:	40V
OPERATING CURRENT:	2A
OPERATING TEMPERATURE	-40°C - +70°C

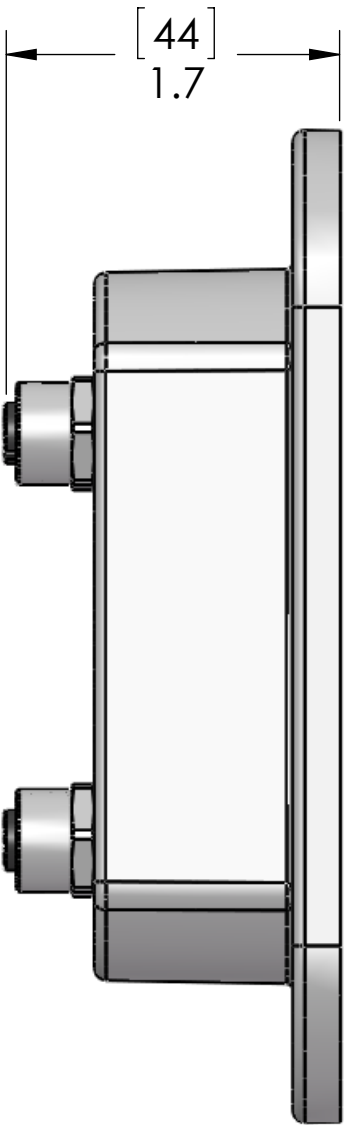

SEALING
GASKET

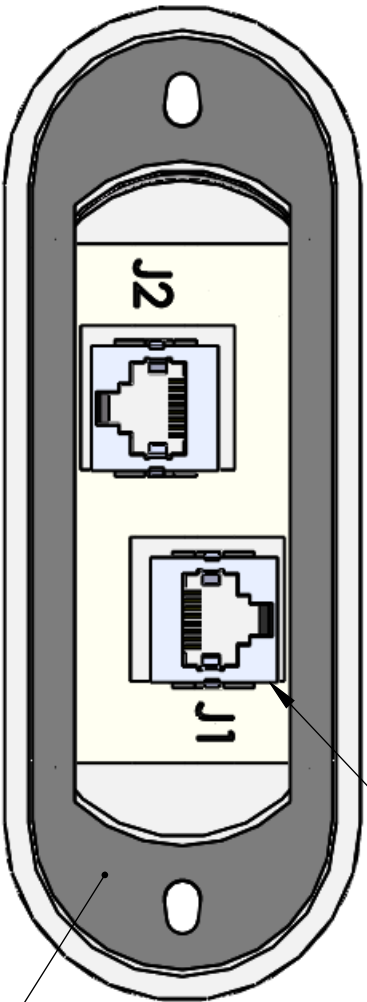

- 1 = White/Blue
- 2 = White/Brown
- 3 = Brown
- 4 = Orange (-TX)
- 5 = White/Green (+RX)
- 6 = White/Orange (+TX)
- 7 = Blue
- 8 = Green (-RX)



- 1 = White/Orange (+TX)
- 2 = Orange (-TX)
- 3 = White/Green (+RX)
- 4 = Blue
- 5 = White/Blue
- 6 = Green (-RX)
- 7 = White/Brown
- 8 = Brown

RJ45 Female
Jacks (2x)

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION				
			DRAWN	BEM					TITLE:
			CHECKED						
			ENG APPR.						
			MFG APPR.						
		Q.A.							
		MATERIAL	COMMENTS:	SIZE DWG. NO. REV					
									FINISH
				DO NOT SCALE DRAWING	SCALE: 1:1		WEIGHT:		SHEET 1 OF 1
				B MDE45-2-8FR-RJ45-CA A					