
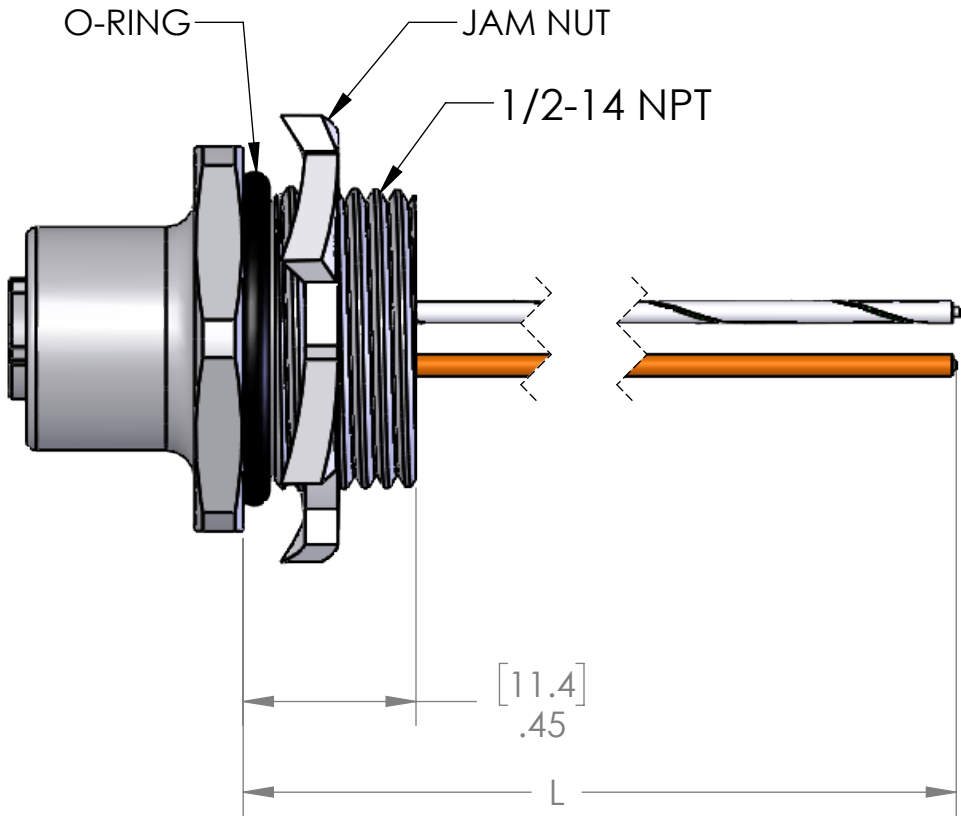


PIN #	COLOR
1	Wht / Org
2	Wht / Grn
3	Orange
4	Green

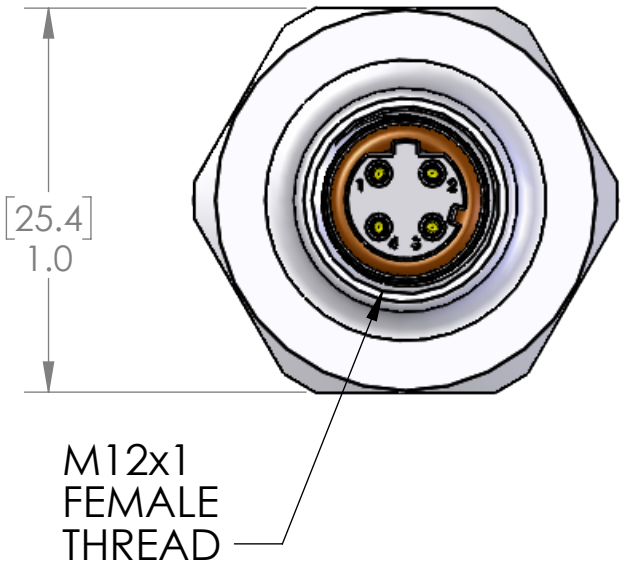

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	24 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	FPM & NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	08/11/2023
		CHECKED BY	JJH
		CHECK DATE	08/14/2023
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

TABLE A

P/N	L	NUT & O-RING INCLUDED?
MDE45-4FR-2-E45	12" [0.3M]	NO
MDE45-4FR-2-E45-G	12" [0.3M]	YES
MDE45-4FR-2-0.5M-E45	19" [0.5M]	YES
MDE45-4FR-2-1M-E45	40" [1M]	YES

FOR LONGER LENGTHS, USE MDE45-4FR-2-ZZ WHICH USES AN ETHERNET CABLE INSTEAD OF INDIVIDUAL WIRES.

MENCOM CORPORATION

TITLE:  
4 PL FEM MDE45 RCP 1/2" NPT

SIZE	DWG. NO.	REV
B	MDE45-4FR-2-ZZ-E45	C
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1