



PIN #	COLOR
1	WHITE w/ORANGE
2	WHITE w/GREEN
3	ORANGE
4	GREEN

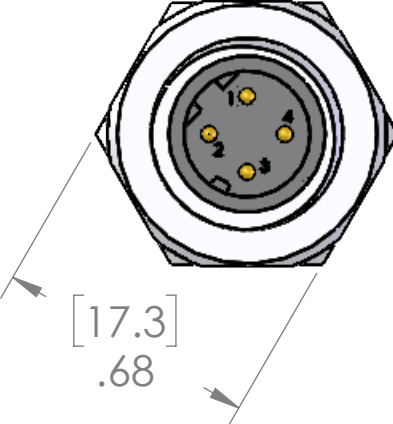

[17.3]
.68

MATERIALS	
SHELL:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	22 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	POLYAMIDE
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

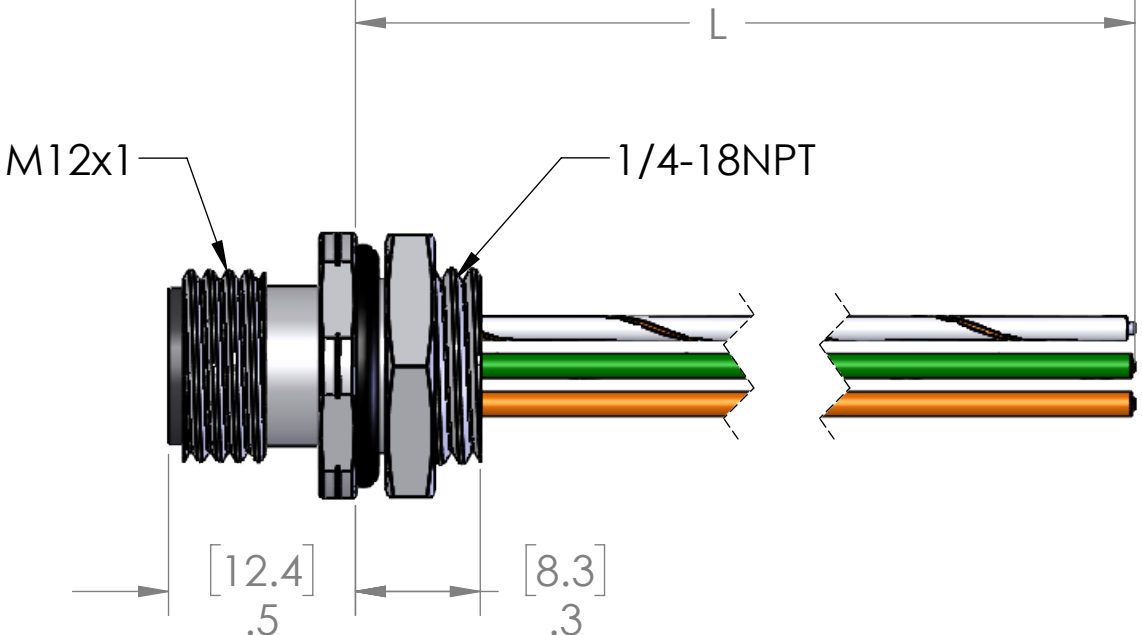

M12x1

1/4-18NPT

L

[12.4]
.5

[8.3]
.3

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	08/16/2023
		CHECKED BY	JJH
		CHECK DATE	08/16/2023
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			

VOLTS		300V
AMPS		4A
TEMP:		105°C

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MDE45-4MR-4-ZZ-E45	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

TABLE A	
P/N	L
MDE45-4MR-4-E45	12" [0.3M]
MDE45-4MR-4-0.5M-E45	20" [0.5M]
MDE45-4MR-4-0.6M-E45	24" [0.6M]
MDE45-4MR-4-1M-E45	40" [1M]
MDE45-4MR-4-2M-E45	79" [2M]
MDE45-4MR-4-5M-E45	197" [5M]
MDE45-4MR-4-10M-E45	393" [10M]
OTHER LENGTHS ARE AVAILABLE PLEASE CONSULT FACTORY	