


<b>PIN #</b>	<b>COLOR</b>
<b>1</b>	<b>BLACK</b>
<b>2</b>	<b>WHITE</b>
<b>3</b>	<b>RED</b>
<b>4</b>	<b>GREEN / YELLOW</b>

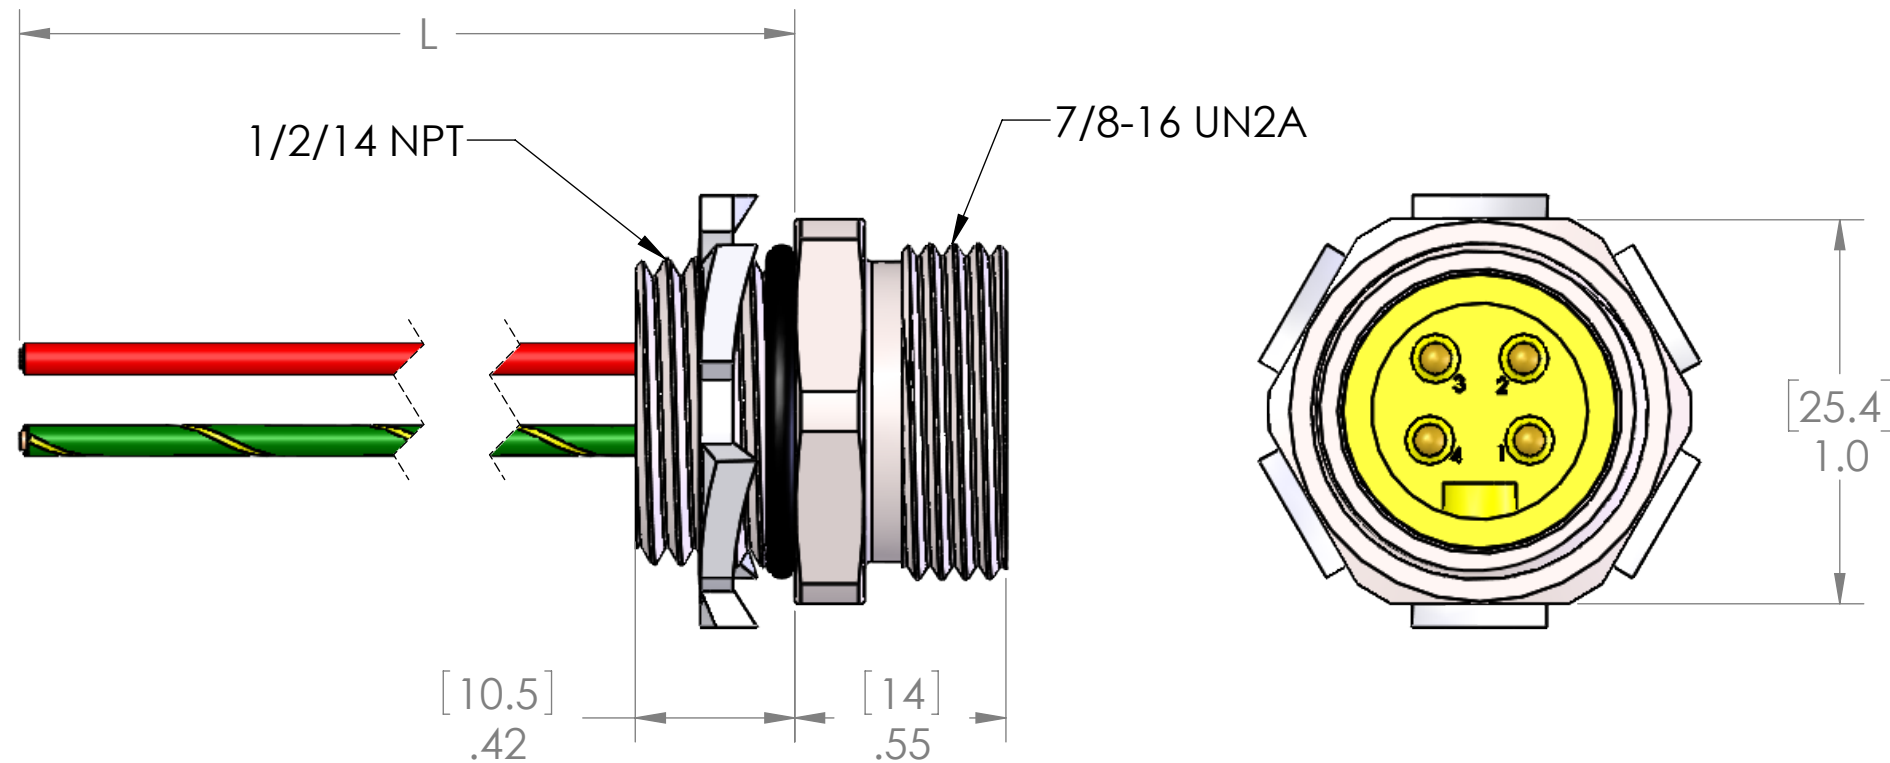

MATERIALS	
SHELL:	STAINLESS STEEL
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-4MR-1-18-SS	12" [0.3m]
MIN-4MR-2-18-SS	24" [0.6m]
MIN-4MR-3-18-SS	36" [0.9m]
MIN-4MR-4-18-SS	48" [1.2m]
MIN-4MR-5-18-SS	60" [1.5m]
MIN-4MR-6-18-SS	72" [1.8m]
MIN-4MR-10-18-SS	120" [3.0m]
MIN-4MR-15-18-SS	180" [4.6m]
MIN-4MR-20-18-SS	240" [6.1m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION  TITLE:  4 PL MIN ML RECP SS		
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	11/10/2023			
		CHECKED BY	JJH			
		CHECK DATE	11/13/2023			
		COMMENTS:				
MATERIAL						
FINISH						
DO NOT SCALE DRAWING						
		SIZE	DWG. NO.		REV	
		<b>B</b>	MIN-4MR-ZZ-18-SS		<b>B</b>	
		SCALE: 2:1		WEIGHT:	SHEET 1 OF 1	

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	8A
TEMP:	105°C