PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK
6	BLUE

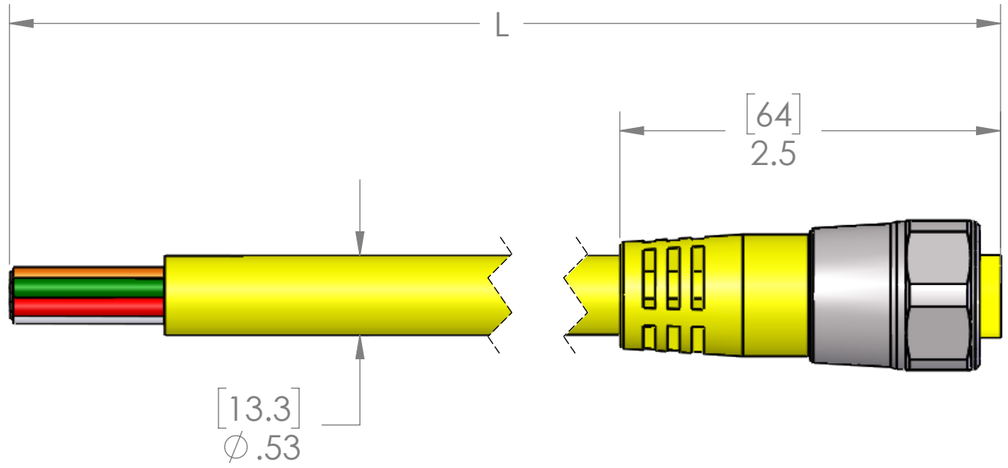

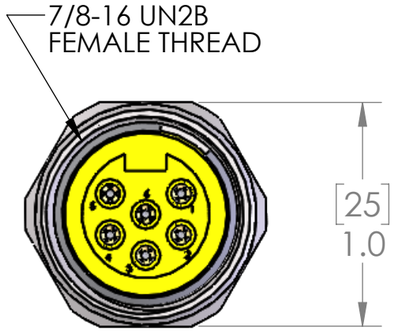

P/N	L	STD?
MIN-6FP-3-SS	36" [0.9m]	YES
MIN-6FP-6-SS	72" [1.8m]	YES
MIN-6FP-12-SS	144" [3.7m]	YES
MIN-6FP-15-SS	180" [4.6m]	NO
MIN-6FP-20-SS	240" [6.1m]	YES
MIN-6FP-30-SS	360" [9.1m]	YES
MIN-6FP-40-SS	480" [12.2m]	NO
MIN-6FP-50-SS	600" [15.2m]	YES
MIN-6FP-60-SS	720" [18.3m]	NO
MIN-6FP-100-SS	1200" [30.5m]	NO

PARTS LISTED AS BEING NOT STANDARD
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	STOOW
AWG:	16 AWG
JACKET:	YELLOW PVC
VOLTAGE:	600V
SHIELD:	NO
COUPLING:	STAINLESS STEEL
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	12/14/2023
CHECKED BY	JJH
CHECK DATE	01/11/2024

COMMENTS:

MENCOM CORPORATION

TITLE:
6 PL FEM PLG 16AWG

SIZE	DWG. NO.	REV
B	MIN-6FP-ZZ-SS	B

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1