


PIN #	COLOR
1	ORANGE
2	BLUE
3	RED w/BLACK
4	GREEN w/BLACK
5	WHITE
6	RED
7	GREEN / YELLOW
8	WHITE w/BLACK
9	BLACK

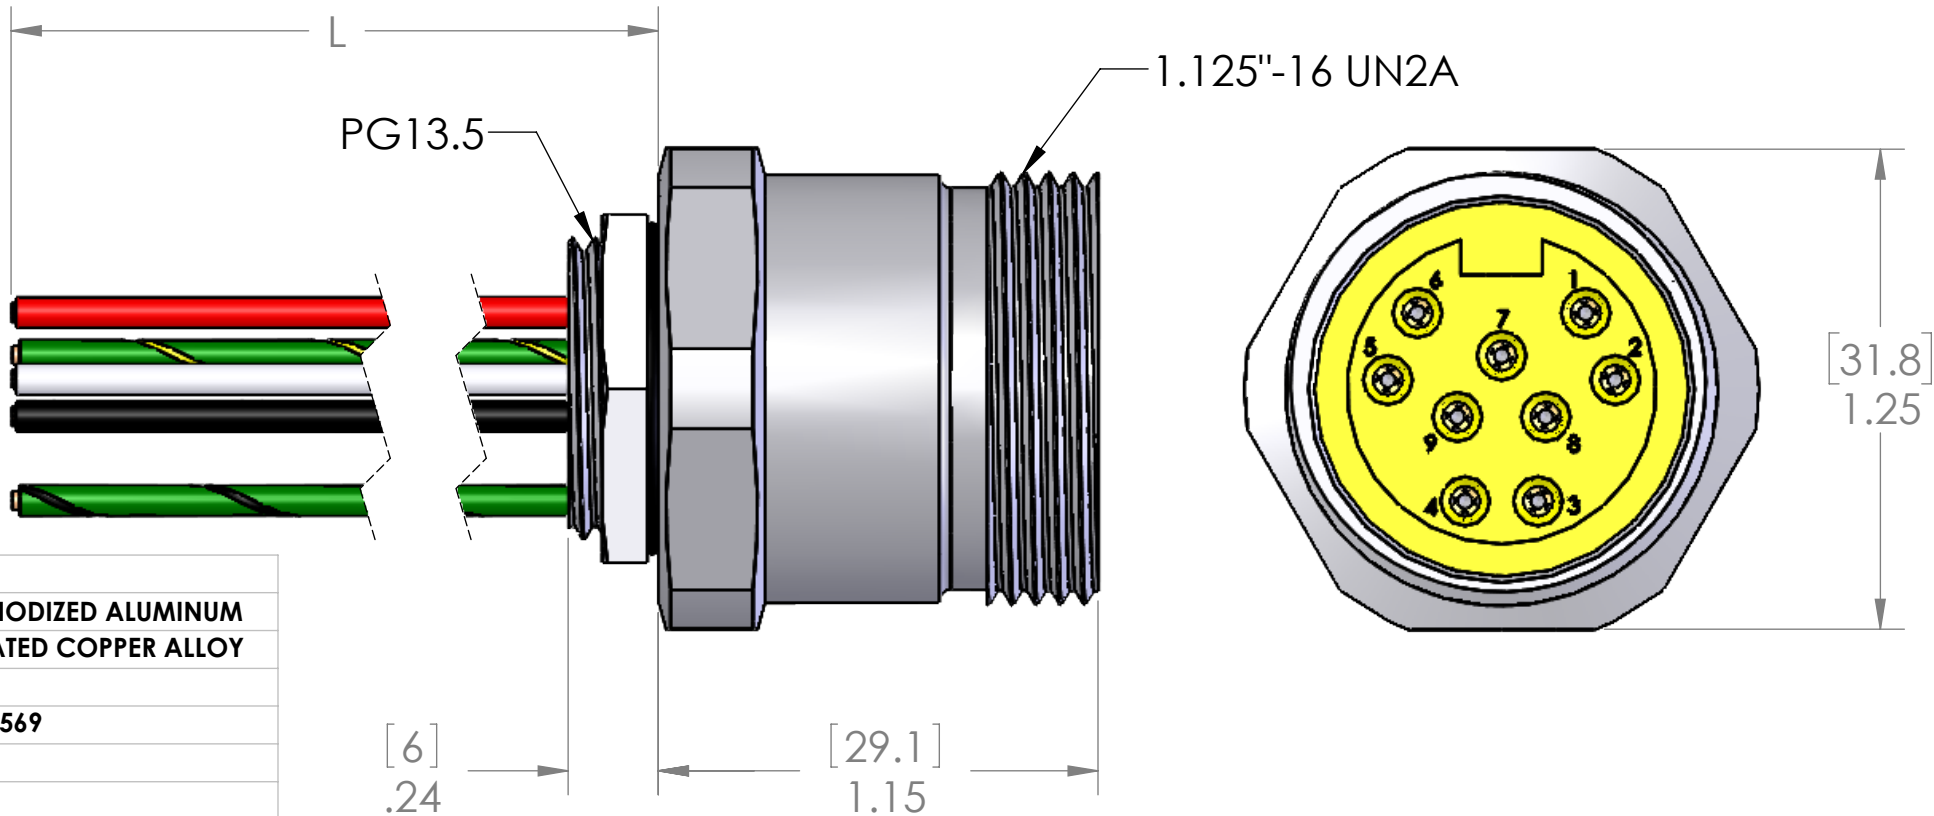

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L
MIN-9FR-1-18-PG13.5	12" [0.3m]
MIN-9FR-2-18-PG13.5	24" [0.6m]
MIN-9FR-3-18-PG13.5	36" [0.9m]
MIN-9FR-4-18-PG13.5	48" [1.2m]
MIN-9FR-5-18-PG13.5	60" [1.5m]
MIN-9FR-6-18-PG13.5	72" 1.8m]
MIN-9FR-10-18-PG13.5	120" [3m]

OTHER LENGTHS ARE AVAILABLE  
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	02/01/2024
	CHECKED BY	JJH
	CHECK DATE	02/01/2024
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-9FR-ZZ-18-PG13.5	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1