
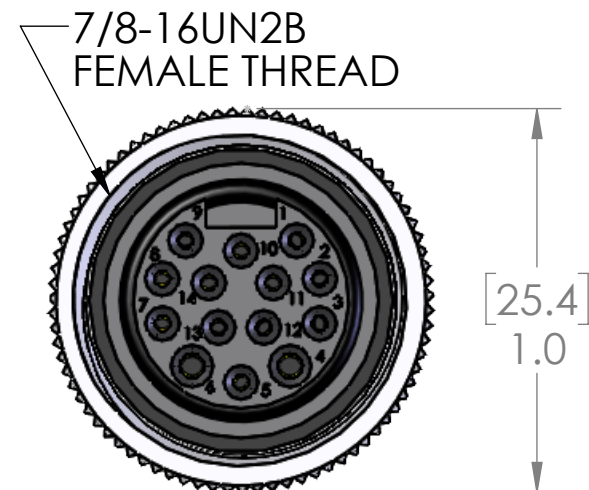


PIN #	COLOR	AWG
1	GRAY / PINK	22
2	WHITE / GREEN	22
3	WHITE / YELLOW	22
4	BROWN	18
5	BROWN / YELLOW	22
6	BLUE	18
7	YELLOW	22
8	GREEN	22
9	PINK	22
10	WHITE	22
11	RED / BLUE	22
12	BROWN / GREEN	22
13	GRAY	22
14	RED	22

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	18 & 22 AWG
JACKET:	BLACK PVC
VOLTAGE:	600V
SHIELD:	MYLAR W/DRAIN
COUPLING:	NICKEL PLATED BRASS
INSERT:	BLACK POLYAMIDE
O-RING:	NBR
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

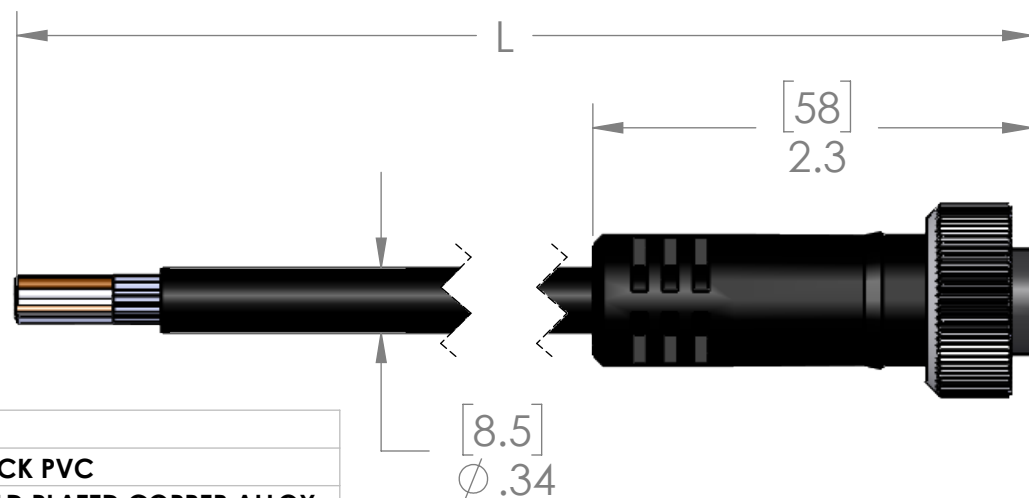

P/N	L	STD?
MINM-14FP-1M	40" [1m]	YES
MINM-14FP-2M	79" [2m]	YES
MINM-14FP-3M	118" [3m]	NO
MINM-14FP-4M	157" [4m]	NO
MINM-14FP-5M	197" [5m]	YES
MINM-14FP-6M	236" [6m]	NO
MINM-14FP-8M	315" [8m]	NO
MINM-14FP-10M	393" [10m]	YES
MINM-14FP-15M	590" [15m]	YES
MINM-14FP-20M	786" [20m]	NO

PARTS LISTED AS NOT BEING STANDARD  
MAY HAVE MINIMUM ORDER QUANTITIES

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	JJH	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	01/18/2024				TITLE:		
		CHECKED BY	JJH						
		CHECK DATE	01/19/2024						
		COMMENTS:		SIZE DWG. NO. REV <b>B</b> MINM-14FP-ZZ <b>B</b>					
MATERIAL									
FINISH									
DO NOT SCALE DRAWING									

VOLTS	300V
AMPS	6A / 1A
TEMP:	105°C

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.