


MALE	WIRING	FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
19	-----	19

PINS 5, 7 & 12 ARE 18AWG

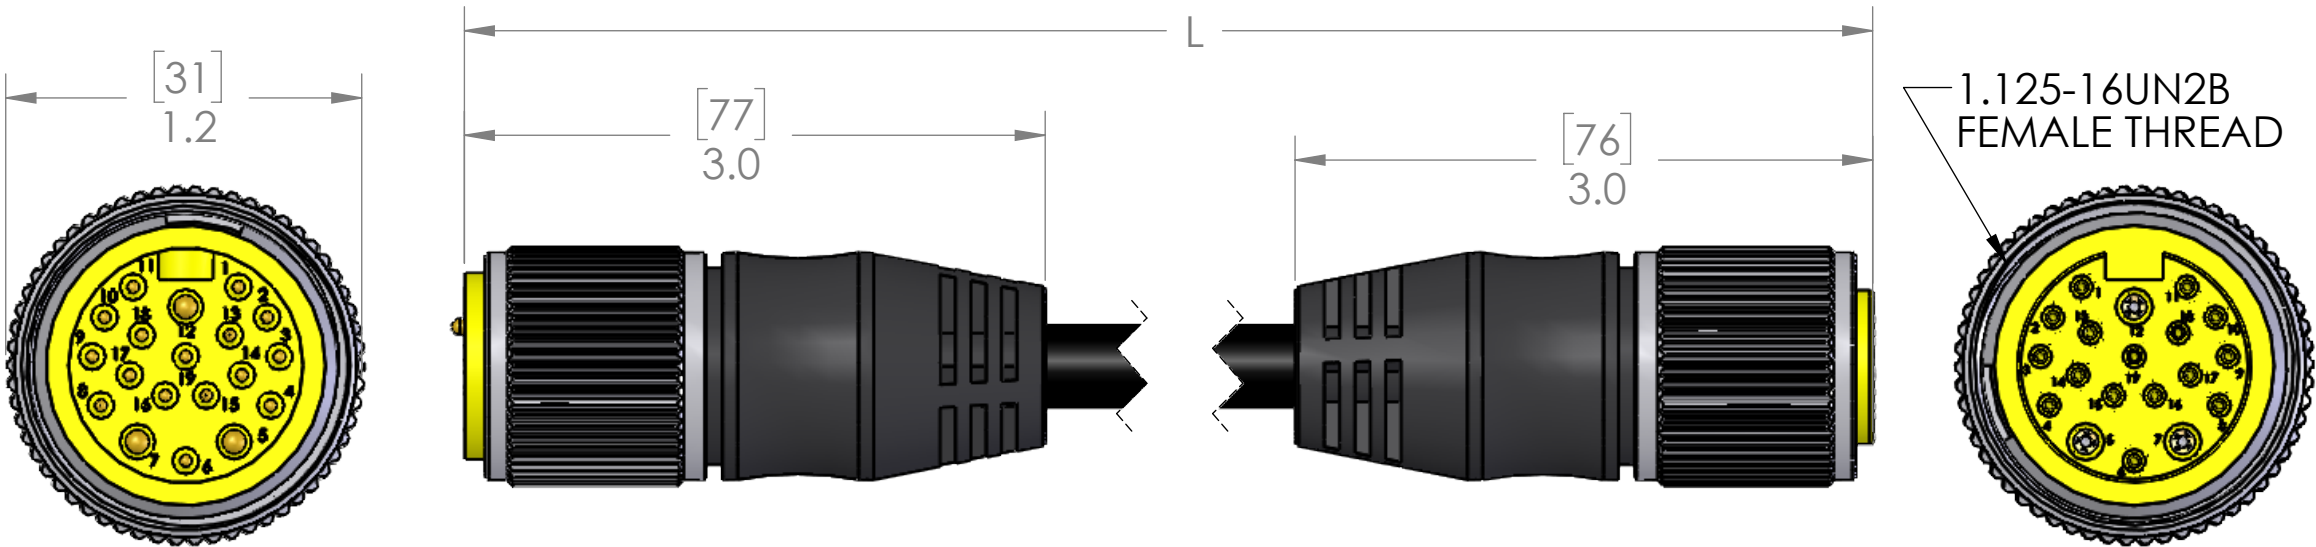

MATERIALS	
BODY:	BLACK PUR
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWG
AWG:	18 & 22 AWG
JACKET:	BLACK PUR
VOLTAGE:	300V
SHIELD:	MYLAR W/DRAIN
COUPLING:	NICKEL PLATED BRASS
INSERT:	YELLOW PVC
O-RING:	N/A
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 6A
ALL OTHERS	300V, 1A
OR	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	6A/1A or 4A/2A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	03/01/2024
	CHECKED BY	JJH
	CHECK DATE	03/01/2024
MATERIAL		
	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

P/N	L	STD?
MINP-19MFP-3	36" [0.9m]	YES
MINP-19MFP-6	72" [1.8m]	YES
MINP-19MFP-12	144" [3.7m]	YES
MINP-19MFP-15	180" [4.6m]	NO
MINP-19MFP-20	240" [6.1m]	YES
MINP-19MFP-30	360" [9.1m]	YES
MINP-19MFP-40	480" [12.2m]	NO
MINP-19MFP-50	600" [15.2m]	NO
MINP-19MFP-60	720" [18.3m]	NO
MINP-19MFP-100	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MINP-19MFP-ZZ	D
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1