| PIN # | COLOR |
|---|---|
| | |
| 1 | ORANGE |
| 2 | BLUE |
| 3 | WHITE w/BLACK |
| 4 | BLACK |
| 5 | WHITE |
| 6 | RED |
| 7 | GREEN / YELLOW |
| 8 | RED w/BLACK |

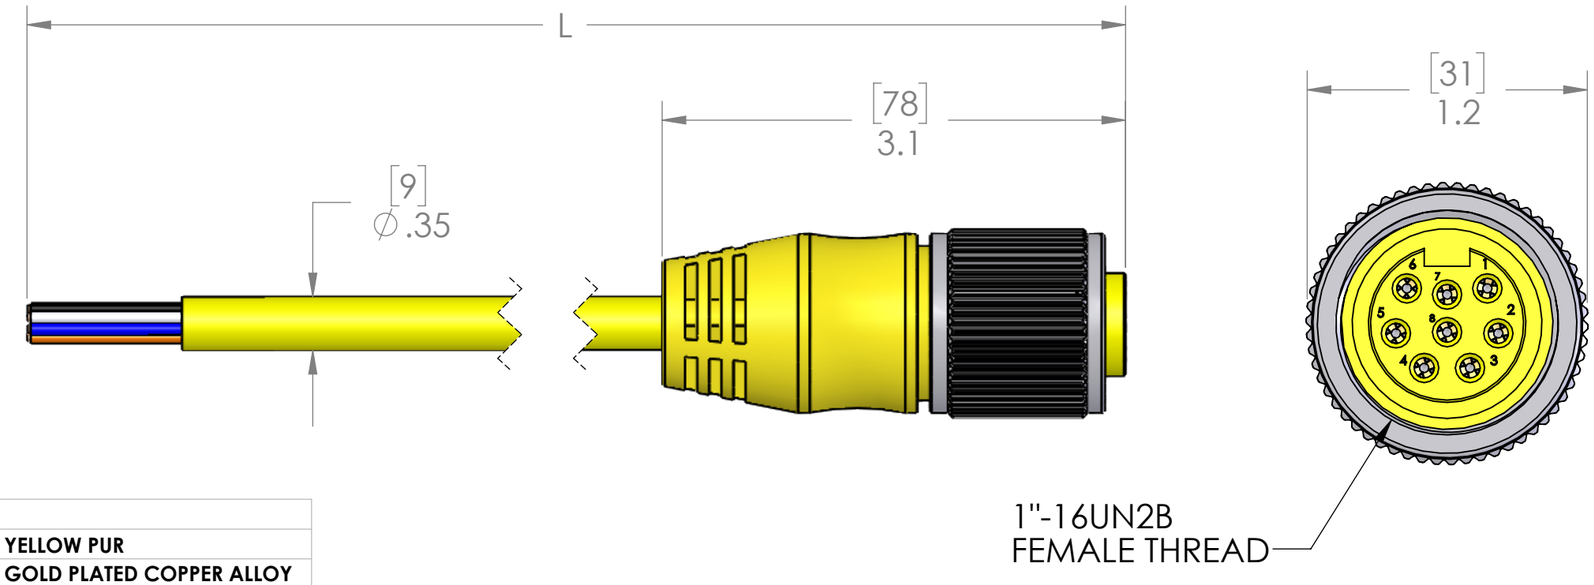


| MATERIALS | |
|---|---|
| BODY: | YELLOW PUR |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 18 AWG |
| JACKET: | YELLOW PUR |
| VOLTAGE: | 300V |
| SHIELD: | NO |
| COUPLING: | NICKEL PLATED BRASS |
| INSERT: | YELLOW PVC |
| O-RING: | N/A |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | UL TYPE 4 & 12, IEC IP69 |

| P/N | L | STD? |
|---|---|---|
| | | |
| MINP-8FPX-3 | 36" [0.9m] | YES |
| MINP-8FPX-6 | 72" [1.8m] | YES |
| MINP-8FPX-12 | 144" [3.7m] | YES |
| MINP-8FPX-15 | 180" [4.6m] | NO |
| MINP-8FPX-20 | 240" [6.1m] | YES |
| MINP-8FPX-30 | 360" [9.1m] | YES |
| MINP-8FPX-40 | 480" [12.2m] | NO |
| MINP-8FPX-50 | 600" [15.2m] | NO |
| MINP-8FPX-60 | 720" [18.3m] | NO |
| MINP-8FPX-100 | 1200" [30.5m] | NO |

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 300V |
| AMPS | 5A |
| TEMP: | 80°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 03/08/2024 |
| CHECKED BY | JJH |
| CHECK DATE | 03/11/2024 |

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MINP-8FPX-ZZ | REV C

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1