DIN	M12
PIN #	PIN #
1	4
2	3
GND	5
	1&2 NOT USED

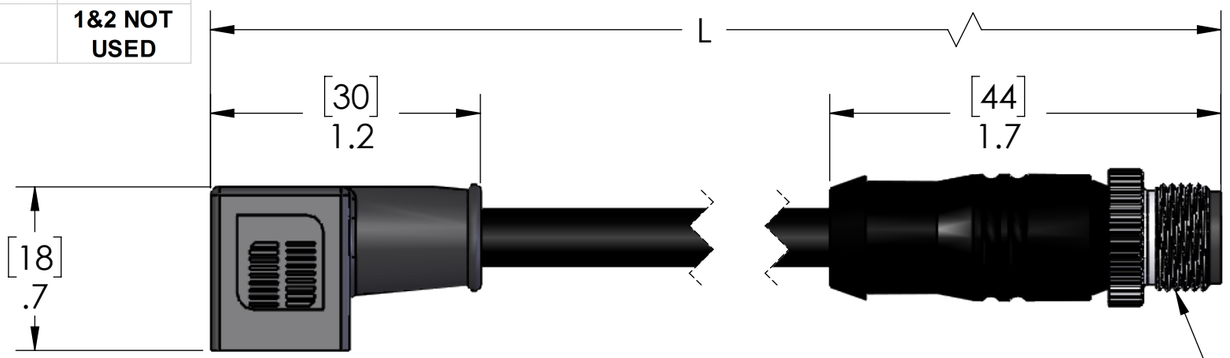

ORIENTATION OF THE M12 CONNECTOR IS RANDOM



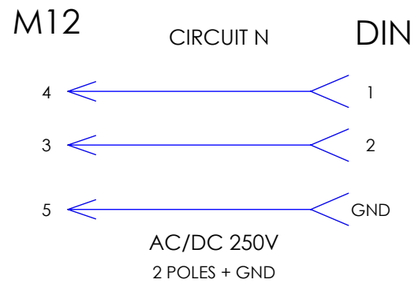

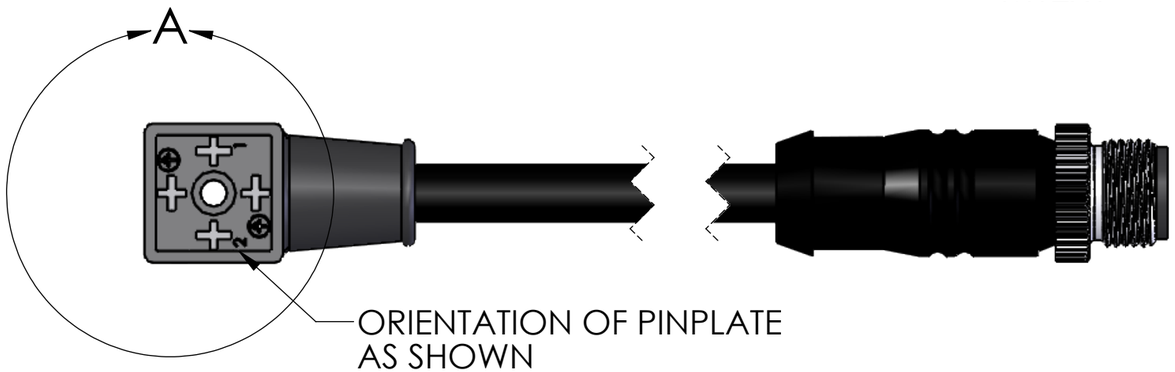

ORIENTATION OF PINPLATE AS SHOWN

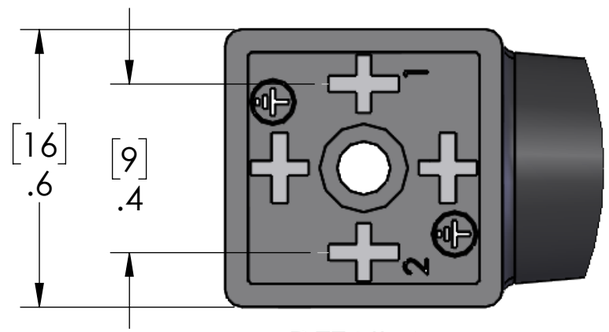

DETAIL A
SCALE 3 : 1

P/N	L
VEN-F30-3502	20" [0.5m]
VEN-130-3502	40" [1m]
VEN-H30-3502	59" [1.5m]
VEN-230-3502	79" [2m]
VEN-330-3502	118" [3m]
VEN-430-3502	157" [4m]
VEN-530-3502	197" [5m]
VEN-630-3502	236" [6m]
VEN-830-3502	315" [8m]
VEN-A30-3502	393" [10m]

MATERIAL	
DIN CONNECTOR	
BODY:	BLACK POLYAMIDE
CONTACTS:	COPPER ALLOY W/ SILVER PLATED
GASKET:	THERMOPLASTIC
SCREW:	STEEL ZINC PLATE
M12 CONNECTOR	
BODY:	BLACK PVC
CONTACTS:	COPPER ALLOY W/ GOLD PLATING
COUPLING NUT:	NICKEL PLATED BRASS
CABLE:	20/3 BLACK PVC
IP65	

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	250V MAX
AMPS	4A
TEMP:	90°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	07/16/2019
CHECKED BY	ADM
CHECK DATE	07/24/2019

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	VEN-ZZ20-3502	A
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1