

Data sheet

Type 360291

Page 1/3

P/N
360291


2023/06/23

Version: Y


Illustrations



Dimensional drawing

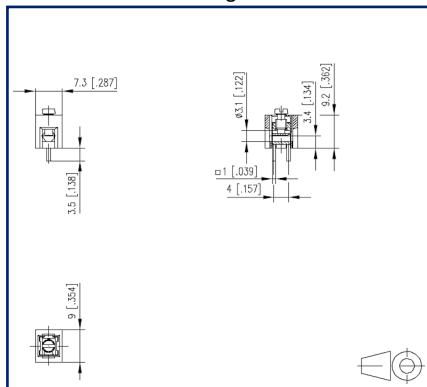

Drill pattern

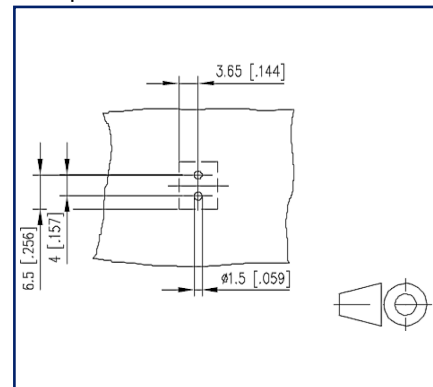

See enlarged drawings at the end of document

Product specification

- screw type terminal block, solderable, double solder pins
- direction of connection 90°
- wire protector
- color black
- with molded housing, screw brought down by hand (transport safety)



Technical Data

General Data

Tightening torque SEV	0.5 Nm
Tightening torque UL	4.4 lb-in
Solder pin length	3.5 mm
min. number of poles	1
max. number of poles	1
Insulating material class	CTI 600

Terminal data

rat.wiring solid AWGmax	0.33 mm ² - 2 mm ² / AWG 22 - AWG 14
rat.wiring strand.AWGmax	0.33 mm ² - 1.5 mm ² / AWG 22 - AWG 14

Approvals

 V / A / AWG	50 / 15 / 22 - 14
--	-------------------

approval UL - File No.	E121004
------------------------	---------

Material

terminal body thread	M3
terminal body material	CuZnPb
terminal body surface	Ni + Sn
screw thread	M3
screw material	8,8
screw surface	Zn Cr(VI)-frei/free
wire protector material	CuNi18

Climatic Data

upper limit temperature	105 °C
lower limit temperature	-40 °C

general

Tolerance	ISO 2768 -mH
Solderability	Acc. to JEDEC JESD22-B102E 245°C/5s

U | Contact

Data sheet
Type 360291

Page 3/3


P/N
360291

2023/06/23

Version: Y

Illustrations

Dimensional drawing

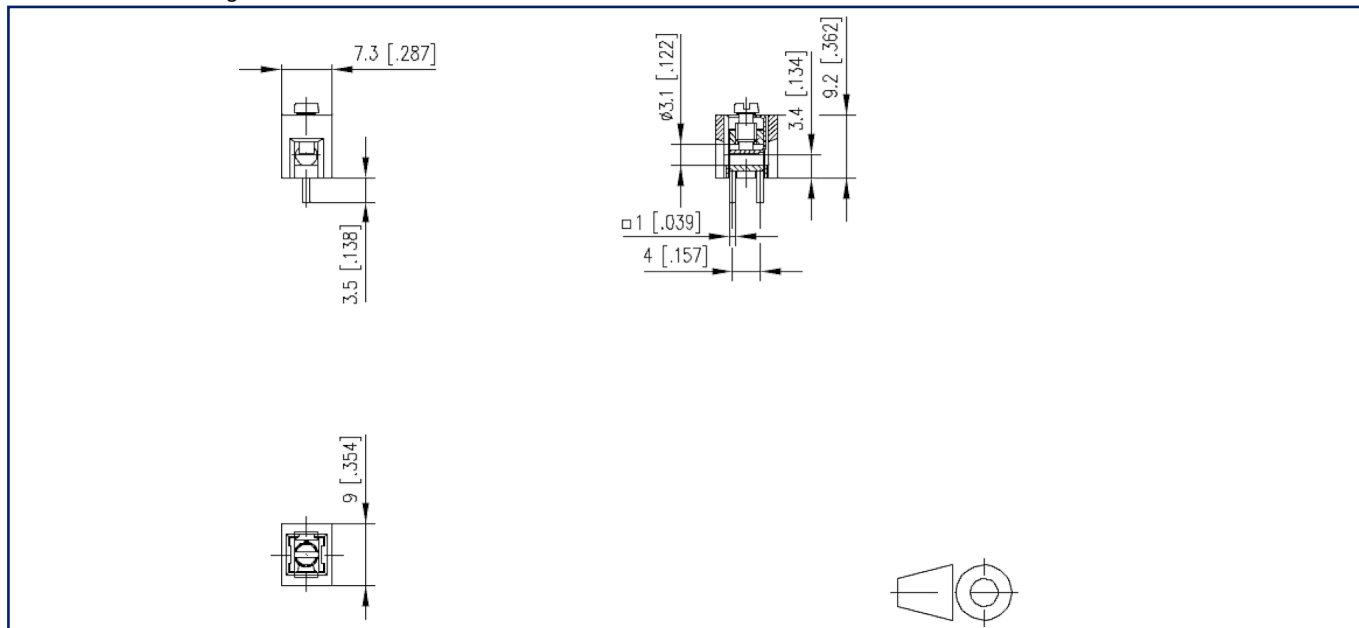

Drill pattern

